

1

2

3

4

5

6

7

A

B

C

D

E

F

G

H

A

B

C


D

E


F

G

H

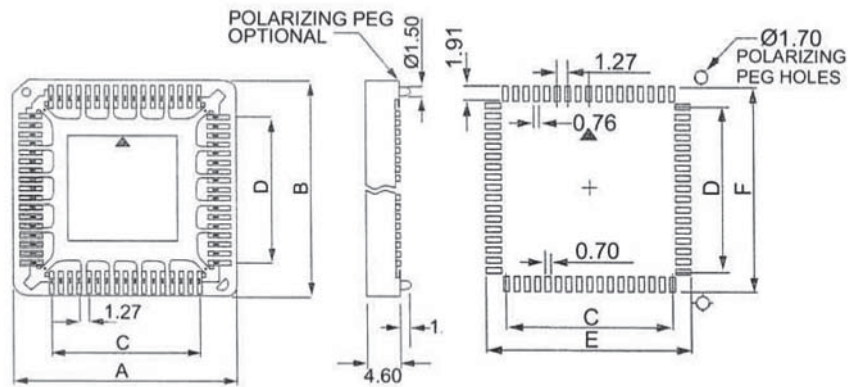

No. of Contacts	Quantity in tube	Dimension					
		A	B	C	D	E	F
20	39	15,34	15,34	5,08	5,08	10,03	10,03
28	33	17,85	17,85	7,62	7,62	12,57	12,57
32	29	17,85	20,42	7,62	10,16	12,57	15,11
44	26	23,07	23,07	12,70	12,70	17,65	17,65
52	23	25,50	25,50	15,24	15,24	20,19	20,19
68	19	31,00	31,00	20,32	20,32	25,27	25,27
84	16	36,10	36,10	25,40	25,40	30,35	30,35



Notes:

Insulator

PPS, UL 94V-0

Contacts

Phosphor Bronze

Matte Tin Plated 150U" over Nickel

Current Rating

1A

Insulating Resistance

10000M ohm Min.

Withstanding Voltage

1000V AC

Contact Resistance

15m ohm Max.

Operating Temperature

-40 Degree to +105 Degree

A-CCSxx-x-xxx-R
 $\begin{matrix} \text{L}_1 & \text{L}_2 & \text{L}_3 \end{matrix}$

1. No. of Contacts

20/28/32/44/52/68/84

2. Finish



z - Tin

G - Gold

3. Version

SM: without polarizing peg, tube packing

Unit: MM

Scale	1:1						Name	Item No. ACCSxx-x-xxx-R	
TOLERANCE						Drawn	11.07.11		Chappell
X.X	±0.40					Approved		Title Chip Carrier sockets, SMT	
X.XX	±0.25								
X.XXX	±0.15							Drawing No.	
Angle	±3°								
									rev00

1

2

3

4

5

6

7