



## Features

- Shielded construction
- Carbonyl powder core
- High saturation current
- Inductance range: 0.33 to 68  $\mu$ H
- AEC-Q200 qualified
- RoHS compliant\* and halogen free\*\*

## Applications


- Automotive systems:
  - Driver assistant
  - Information
  - Entertainment
  - Lighting
- DC/DC converters
- Power supplies

# SRP7050TA Series - Shielded Power Inductors

## Electrical Specifications @ 25 °C

| Bourns Part Number | Inductance @ 100 KHz / 1 V |          | Q (Min.) @100 KHz / 1 V | SRF (MHz) Typ. | DCR (m $\Omega$ ) Typ. | DCR (m $\Omega$ ) Max. | Irms (A) | Isat (A) |
|--------------------|----------------------------|----------|-------------------------|----------------|------------------------|------------------------|----------|----------|
|                    | L ( $\mu$ H)               | Tol. (%) |                         |                |                        |                        |          |          |
| SRP7050TA-R33M     | 0.33                       | $\pm 20$ | 10                      | 100            | 2.5                    | 3                      | 25       | 32       |
| SRP7050TA-R40M     | 0.40                       | $\pm 20$ | 10                      | 100            | 3.1                    | 3.7                    | 23       | 31       |
| SRP7050TA-R47M     | 0.47                       | $\pm 20$ | 10                      | 95             | 3.5                    | 3.9                    | 22       | 30       |
| SRP7050TA-R56M     | 0.56                       | $\pm 20$ | 10                      | 80             | 3.6                    | 4.2                    | 20       | 27       |
| SRP7050TA-R60M     | 0.60                       | $\pm 20$ | 10                      | 80             | 3.8                    | 4.3                    | 19       | 25       |
| SRP7050TA-R68M     | 0.68                       | $\pm 20$ | 10                      | 75             | 4                      | 4.5                    | 18       | 24       |
| SRP7050TA-R82M     | 0.82                       | $\pm 20$ | 10                      | 70             | 4.6                    | 4.9                    | 16.5     | 22       |
| SRP7050TA-1R0M     | 1.0                        | $\pm 20$ | 10                      | 50             | 6.1                    | 6.5                    | 15       | 20       |
| SRP7050TA-1R2M     | 1.2                        | $\pm 20$ | 15                      | 45             | 6.7                    | 7.5                    | 14       | 18       |
| SRP7050TA-1R5M     | 1.5                        | $\pm 20$ | 15                      | 43             | 8.6                    | 9                      | 12       | 16.5     |
| SRP7050TA-1R8M     | 1.8                        | $\pm 20$ | 15                      | 38             | 9.5                    | 11                     | 12       | 15       |
| SRP7050TA-2R2M     | 2.2                        | $\pm 20$ | 15                      | 30             | 11.2                   | 12                     | 10       | 14       |
| SRP7050TA-3R3M     | 3.3                        | $\pm 20$ | 15                      | 26             | 19                     | 20.9                   | 8        | 12       |
| SRP7050TA-4R7M     | 4.7                        | $\pm 20$ | 15                      | 22             | 28                     | 30.8                   | 6.5      | 10       |
| SRP7050TA-5R6M     | 5.6                        | $\pm 20$ | 15                      | 20             | 43.5                   | 49                     | 6        | 9        |
| SRP7050TA-6R8M     | 6.8                        | $\pm 20$ | 15                      | 18             | 46                     | 51.5                   | 5.5      | 8.5      |
| SRP7050TA-8R2M     | 8.2                        | $\pm 20$ | 15                      | 16             | 56                     | 63                     | 5        | 8        |
| SRP7050TA-100M     | 10                         | $\pm 20$ | 15                      | 15             | 60                     | 69                     | 4        | 7.5      |
| SRP7050TA-150M     | 15                         | $\pm 20$ | 15                      | 12             | 81                     | 92                     | 3.5      | 6        |
| SRP7050TA-220M     | 22                         | $\pm 20$ | 15                      | 9              | 140                    | 170                    | 2.5      | 5.5      |
| SRP7050TA-470M     | 47                         | $\pm 20$ | 15                      | 8              | 290                    | 330                    | 1.9      | 2.7      |
| SRP7050TA-560M     | 56                         | $\pm 20$ | 15                      | 7              | 342                    | 396                    | 1.6      | 2.1      |
| SRP7050TA-680M     | 68                         | $\pm 20$ | 15                      | 6              | 386                    | 445                    | 1.2      | 2        |

## Soldering Profile

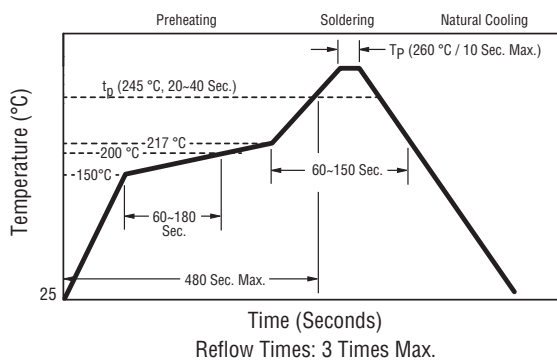


## How to Order

### SRP7050TA - 100 M

Model \_\_\_\_\_  
 Value Code (see table) \_\_\_\_\_  
 Tolerance Code \_\_\_\_\_

## Schematic




## General Specifications

Operating Temperature .....-40 °C to +150 °C  
 (Temperature rise included)  
 Storage Temperature .....-40 °C to +125 °C  
 Rated Current ..... Inductance drops 20 % at Isat  
 Temperature Rise .....40 °C at rated Irms


## Materials

Core.....Carbonyl powder  
 Wire.....Enameled copper  
 Terminal Finish.....Sn  
 Packaging.....800 pcs. per 13-inch reel

## Product Dimensions

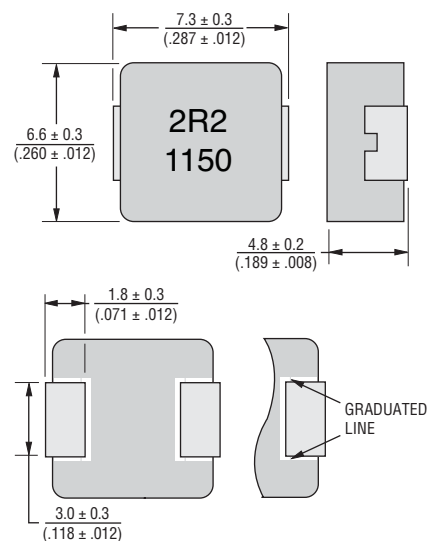

## Recommended Layout



\* RoHS Directive 2002/95/EC Jan. 27, 2003 including annex and RoHS Recast 2011/65/EU June 8, 2011.

\*\*Bourns considers a product to be "halogen free" if (a) the Bromine (Br) content is 900 ppm or less; (b) the Chlorine (Cl) content is 900 ppm or less; and (c) the total Bromine (Br) and Chlorine (Cl) content is 1500 ppm or less.
















Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.

# SRP7050TA Series - Shielded Power Inductors

**BOURNS®**

## L vs. I Charts

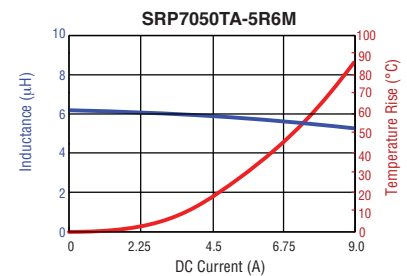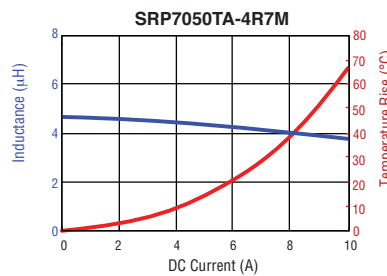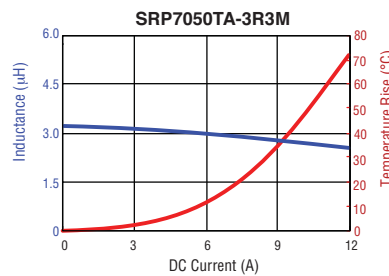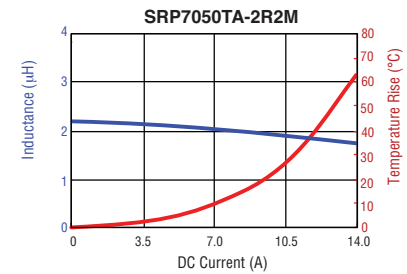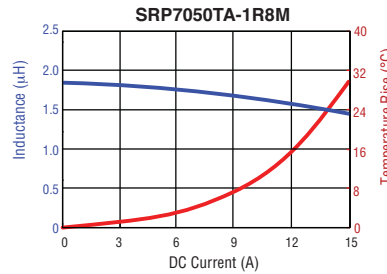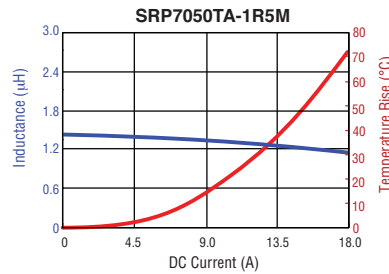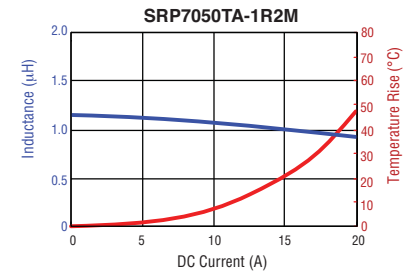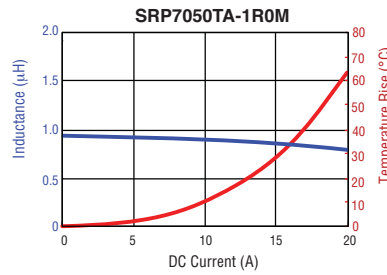
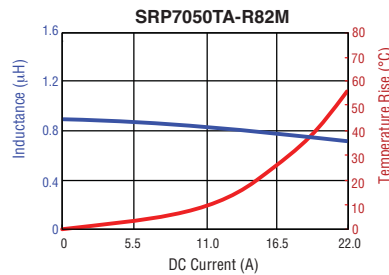
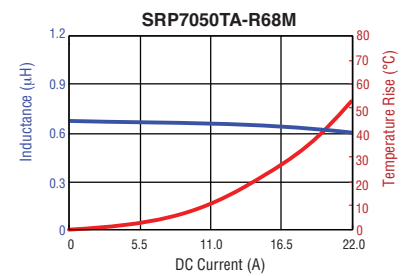
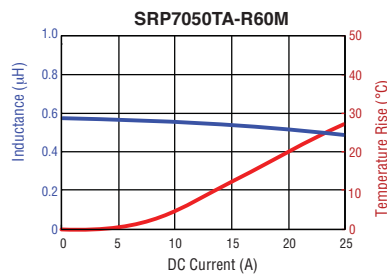
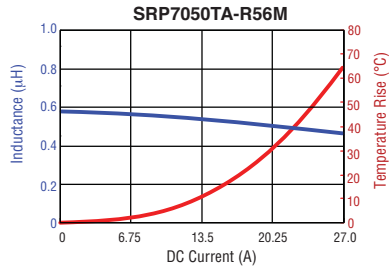
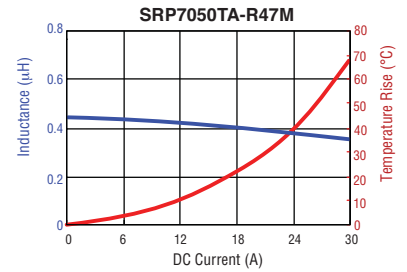
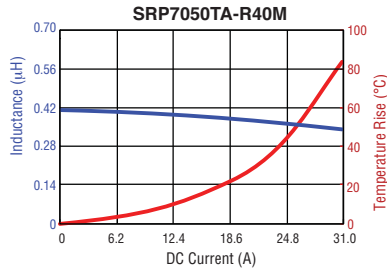
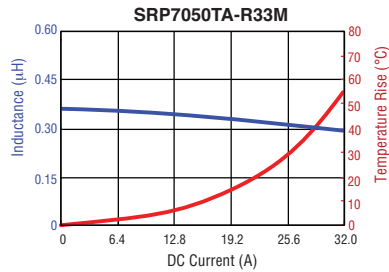


Specifications are subject to change without notice.  
The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.  
Users should verify actual device performance in their specific applications.

# SRP7050TA Series - Shielded Power Inductors

**BOURNS®**

## L vs. I Charts (Continued)

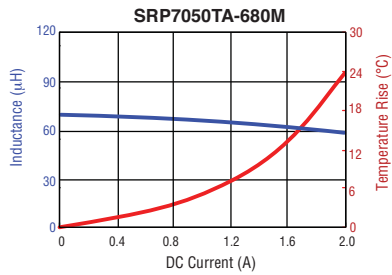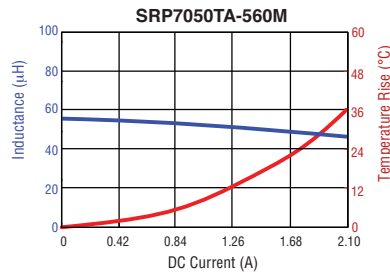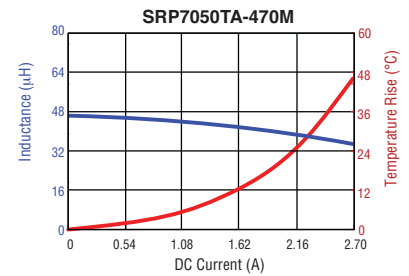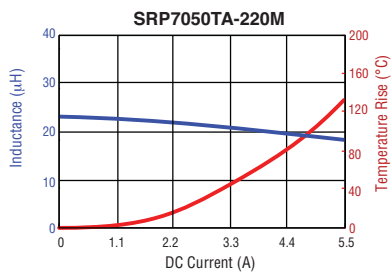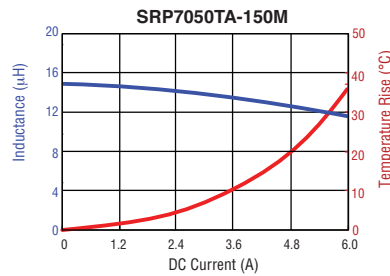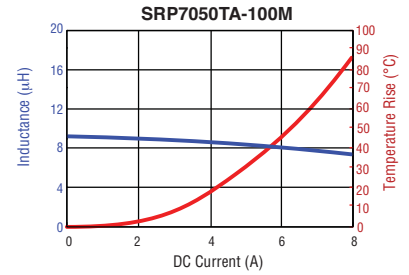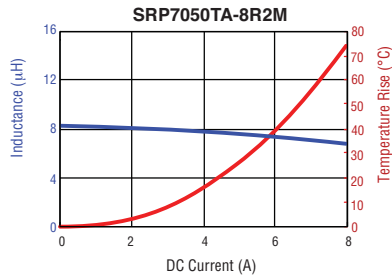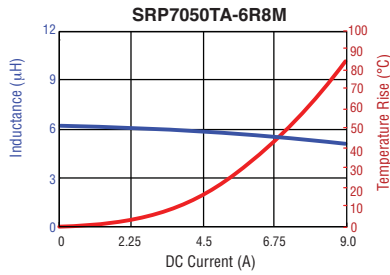


Specifications are subject to change without notice.  
The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.  
Users should verify actual device performance in their specific applications.

# SRP7050TA Series - Shielded Power Inductors

**BOURNS®**

## Packaging Specifications

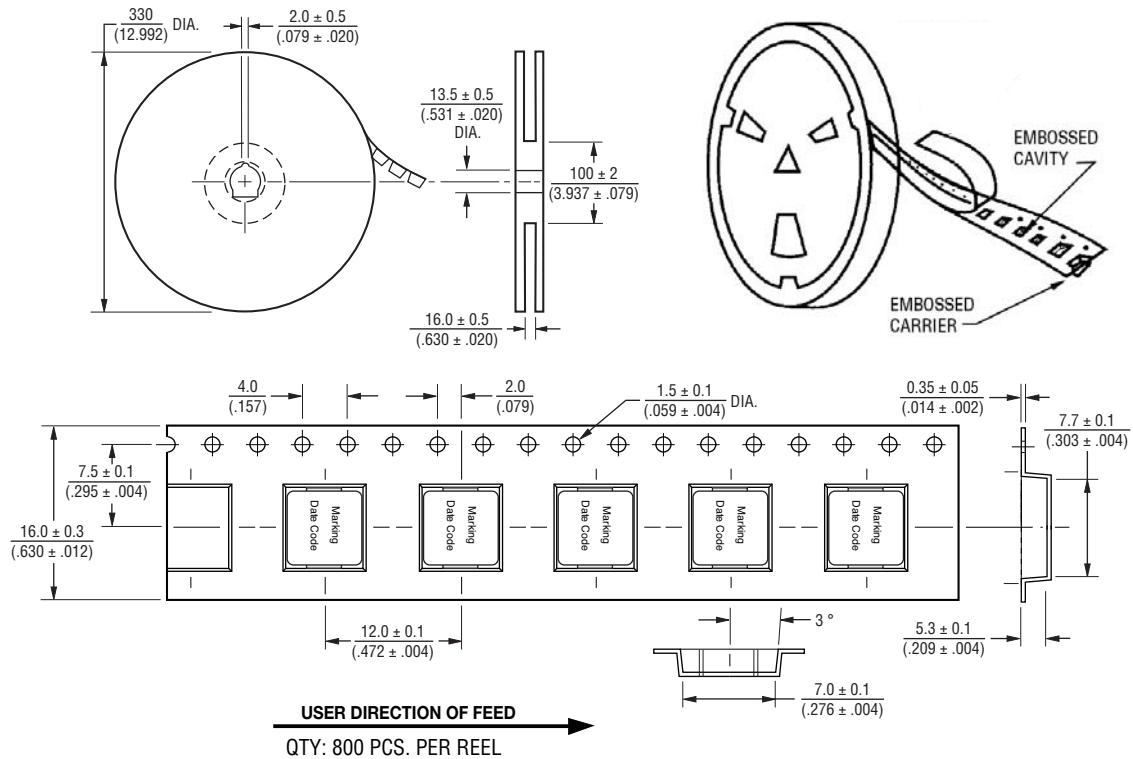

DIMENSIONS:  $\frac{\text{MM}}{\text{(INCHES)}}$

**BOURNS®**

**Asia-Pacific:** Tel: +886-2 2562-4117 • Fax: +886-2 2562-4116

**EMEA:** Tel: +36 88 520 390 • Fax: +36 88 520 211

**The Americas:** Tel: +1-951 781-5500 • Fax: +1-951 781-5700

[www.bourns.com](http://www.bourns.com)