


APPLICABLE STANDARD		ANSI/TIA/EIA-568-B.2.10 CAT6a				
RATING	OPERATING TEMPERATURE RANGE	① -25 °C TO 60 °C	STORAGE TEMPERATURE RANGE	-25 °C TO 60 °C		
	VOLTAGE	125 V AC	OPERATING HUMIDITY RANGE	95 % MAX		
	CURRENT	1 A	APPLICABLE CABLE	—		
SPECIFICATIONS						
ITEM	TEST METHOD		REQUIREMENTS		QT	AT
CONSTRUCTION						
GENERAL EXAMINATION	VISUALLY AND BY MEASURING INSTRUMENT.		ACCORDING TO DRAWING.		X	X
MARKING	CONFIRMED VISUALLY.				X	X
<div style="border: 1px solid black; padding: 5px;"> <p>① THE OPERATION TEMPERATURE INCLUDES THE TEMPERATURE RISE BY CURRENT CARRYING. ② TEMPERATURE RANGE FOR A CONNECTOR UNMATED. ③ USE UNDER THE CONDITION RECOMMENDED BY A CABLE MANUFACTURE.</p> </div>						
COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE	
△						
REMARK			APPROVED	YH. ENAMI	09.06.02	
			CHECKED	YH. ENAMI	09.06.02	
			DESIGNED	MT. ITANO	09.06.02	
			DRAWN	MT. ITANO	09.06.02	
Unless otherwise specified, refer to JIS C 5402.						
Note QT:Qualification Test AT:Assurance Test X:Applicable Test			DRAWING NO.		ELG4-126868-02	
HRS	SPECIFICATION SHEET		PART NO.	TM31P-TM-88P (02)		
	HIROSE ELECTRIC CO., LTD.		CODE NO.	CL222-4626-7-02	△	1/1

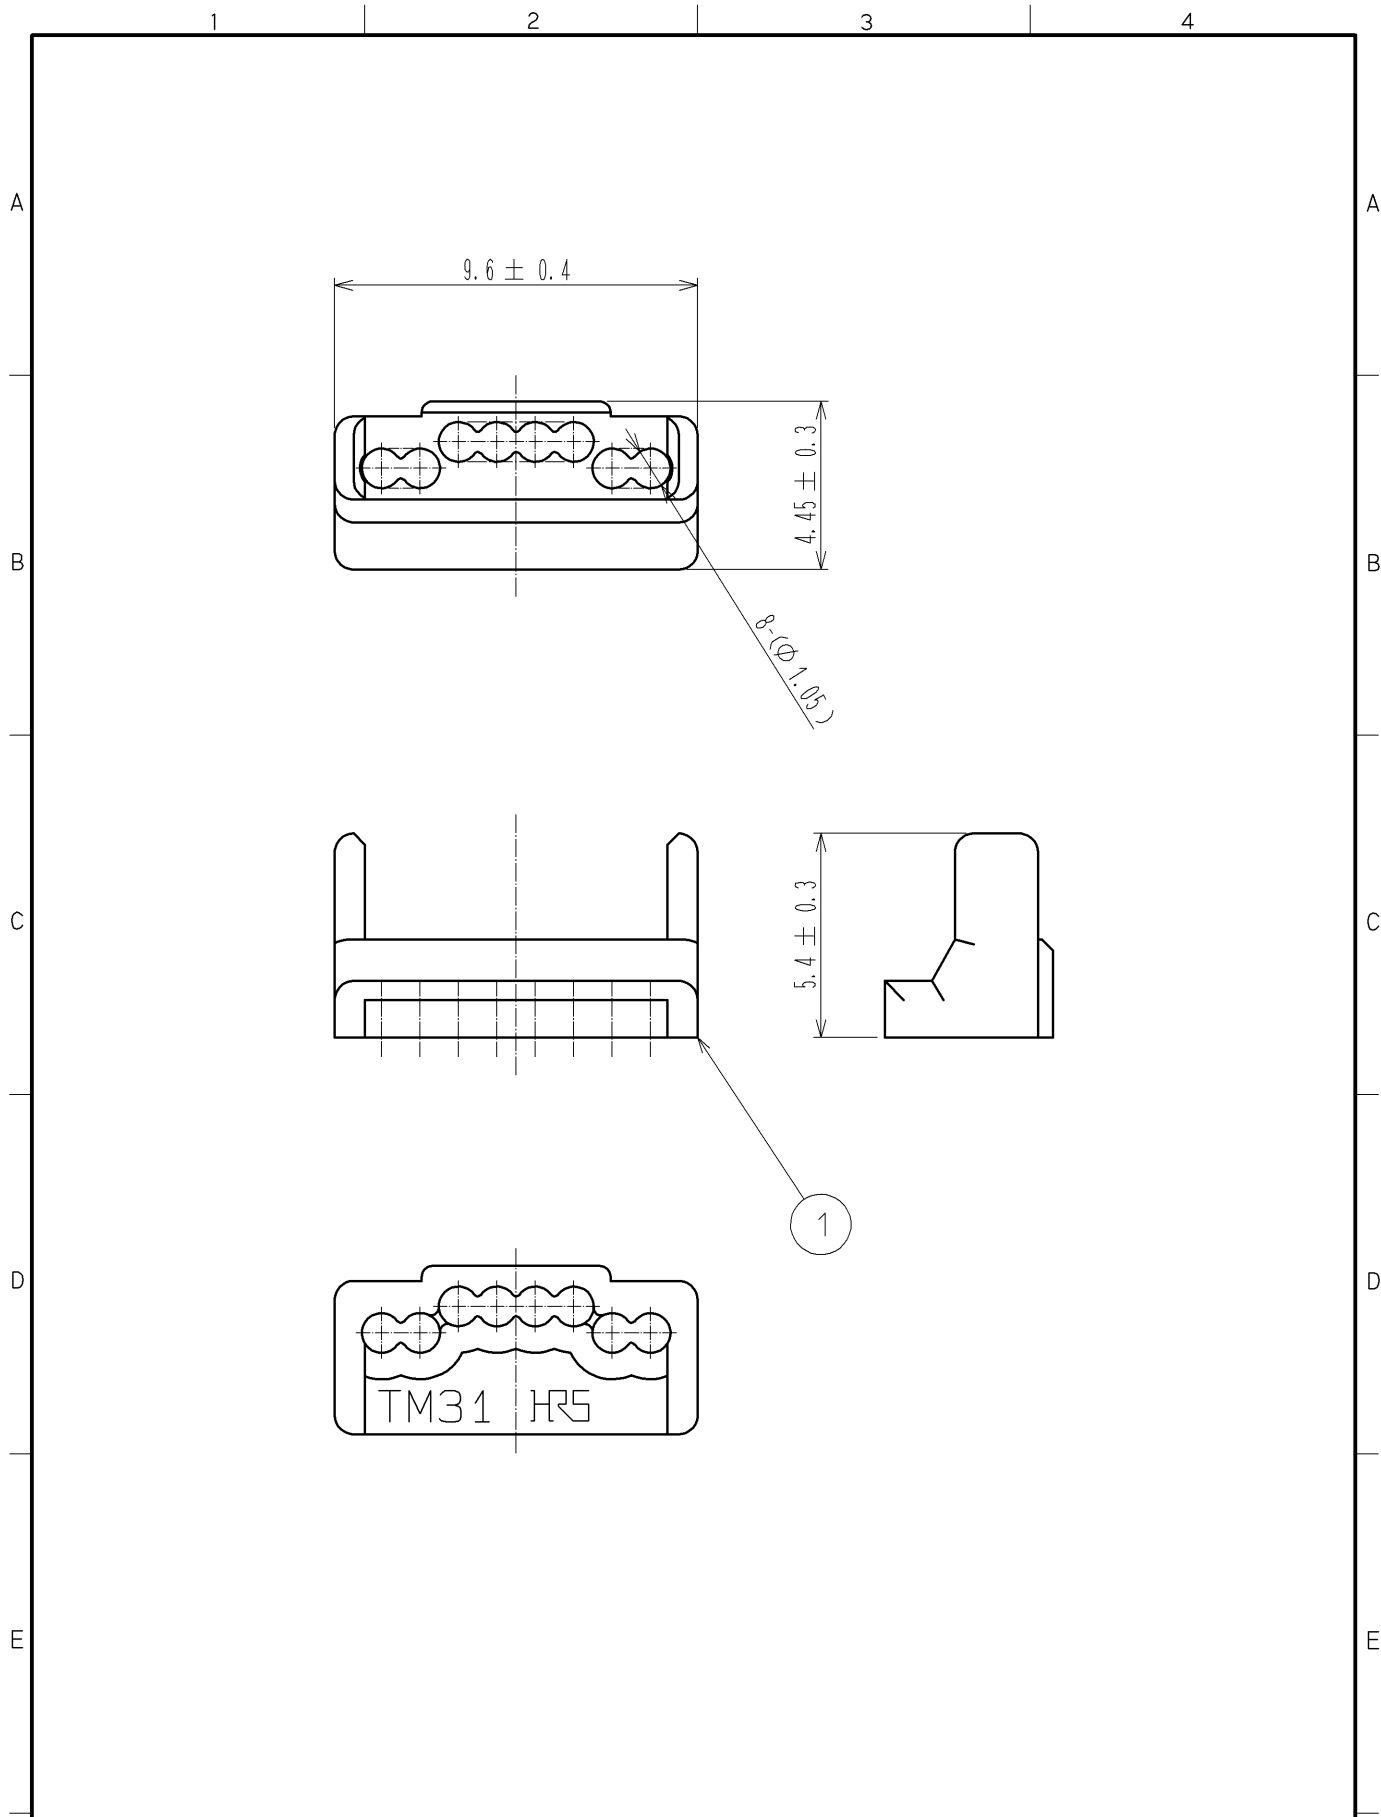

1	POLYCARBONATE	(YELLOW)UL94V-2						
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS			
UNITS mm		SCALE 5 : 1	COUNT 	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
HIROSE ELECTRIC CO., LTD.		APPROVED : YH. ENAMI	09.06.02	DRAWING NO.		EDC3-126868-02		
		CHECKED : YH. ENAMI	09.06.02	PART NO.		TM31P-TM-88P(02)		
		DESIGNED : MT. ITANO	09.06.02	CODE NO.		CL222-4626-7-02		
		DRAWN : MT. ITANO	09.06.02			1/1		