


SEM0506AH


Appearance 外观图

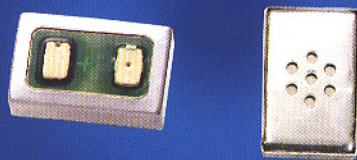

Dimensional Drawing 轮廓图

Units:mm

SEM0506AH

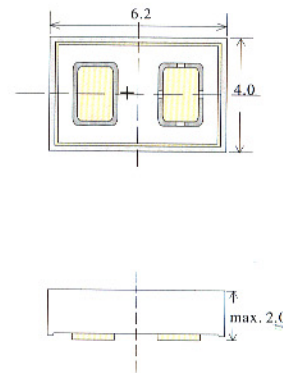


Sensitivity Range 灵敏度范围

-32±4dB

(@1KHz, Vs=2v, Ri=2.2KΩ)


Typical Frequency Response Curve 频率响应曲线

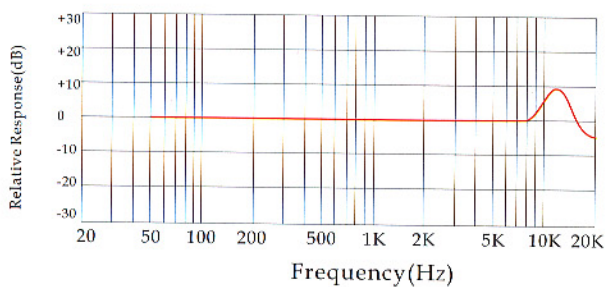

Specification 规格

Sensitivity:	See above (@1KHz, 0dB=1V/Pa)
Directivity:	Omnidirectional
Impedance:	Low impedance
Current Consumption:	Max. 0.5mA
Standard Operation Voltage:	2.0V(DC)
Sensitivity Reduction:	Within-3dB at 1.5V(DC)
S/N Ratio:	More than 58dB

Schematic Diagram 测试电路图

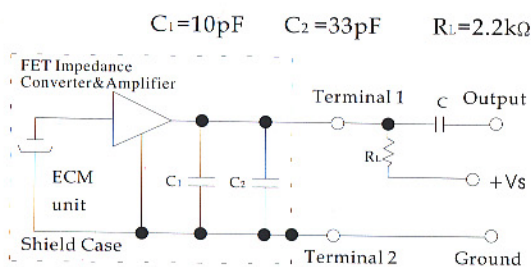

灵敏度:	参照上述: (@1KHz, 0dB=1V/Pa)
方向性:	全向
阻抗:	低阻抗
电流消耗:	最大0.5mA
标准工作电压:	2.0V(DC)
灵敏度减低:	1.5V(DC)时-3dB以内
信噪比:	大于58dB