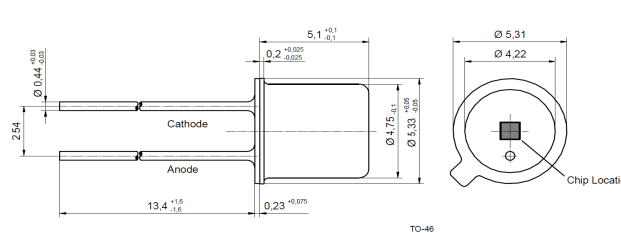


Radiation	Type	Case
Ultraviolet	GaP Schottky	TO-46, UV glass + UG11 filter

	<p>Description: Wide bandwidth and high spectral sensitivity in the UV range (245 nm - 400 nm), mounted in hermetically sealed TO-46 package with UG11 UV filter-glass window</p> <p>Applications Medical engineering (dermatology), output check of UV - lamps and gas burner flame, measurement and control of ecological parameters, radiation control for solarium, UV water purification facilities</p>
---	--

Absolute Maximum Ratings (Ta = 25°C)


ITEMS	SYMBOL	RATINGS	UNIT
Active Area	A	1.2	mm ²
Temperature Coefficient of Ip	TC(Ip)	7	%K
Operating Temperature Range	T _{amb}	-40 to +70	°C
Storage Temperature Range	T _{stg}	-40 to +100	°C
Acceptance Angle at 50% of S _λ	φ	50	deg.

Electrical & Optical Characteristics (Ta = 25°C)

ITEMS	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Reverse Voltage 1*	V _r	I _r =10μA	5	--	--	V
Dark Current	I _d	V _r =5V	--	5	30	pA
Peak Wavelength	λ _p	V _r =0V	--	365	--	nm
Responsivity at λ _p	S _λ	V _r =0V	--	0.07	--	A/W
Sensitivity Range at 1% of S _λ	λ _{min} , λ _{max}	V _r =0V	245	--	400	nm
Spectral Bandwidth at 50% of S _λ	Δλ _{0.5}	V _r =0V	--	85	--	nm
Shunt Resistance	R _{sh}	V _r =10mV	150	200	--	GΩ
Noise Equivalent Power	NEP	λ=365 nm	--	1.8 x 10 ⁻¹⁴	--	W/√Hz
Specific Detectivity	D*	λ=365 nm	--	5.9 x 10 ¹²	--	cm · √Hz · W ⁻¹
Junction Capacitance	C _j	V _r =0V	--	250	--	pF
Switching Time (R _L =50Ω)	t _r , t _f	V _r =5V	--	1; 20	--	ns
Photocurrent at λ=365 nm	I _{ph}	V _r =0V E _e =1 mW/cm ²	--	0.3	--	μA

1* for information only

Typical responsivity

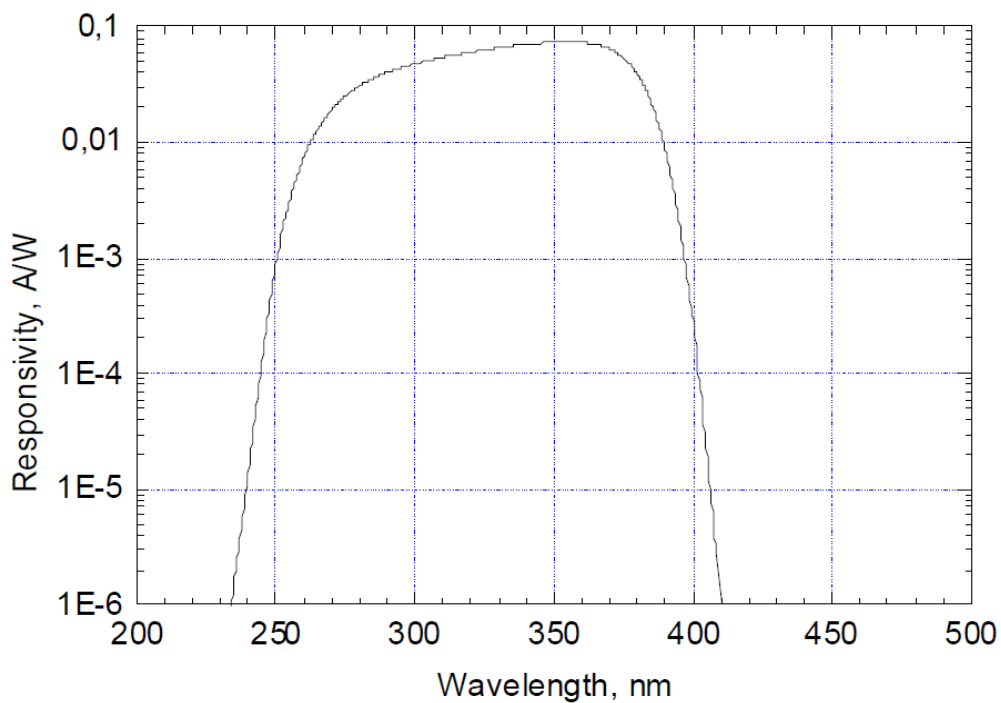

We reserve the right to make changes to improve technical design and may do so without further notice. Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer.