

# BTM-0127



**ORDERING CODE**

**BT M - 01 27**

① ② ③ ④

- ① Magnetic Buzzer
- ② Series Number
- ③ Rated Voltage
- ④ Rated Frequency




No	Specification	Data
1	Rated Voltage (V)	1.5
2	Operating Voltage (V)	1~2
3	Coil Resistance (Ω)	5.5±1
4	Resonant Frequency (Hz)	2731±300
5	*Sound Output at 10cm (dB)	Min 85
6	*Current Consumption (mA)	Max 80
7	Operating Temperature (°C)	-25 ~ +70
8	Storage Temperature (°C)	-30 ~ +80
9	Weight (g)	0.8g
10	Housing Material	PPO
11	RoHS	Yes
12	Packing Quantity	1,000pcs/box

\*Applying rated voltage (Resonant frequency, 1/2 duty, Square wave)

**DIMENSIONS (unit : mm)**

\*Tolerance : ±0.5mm Except Specified

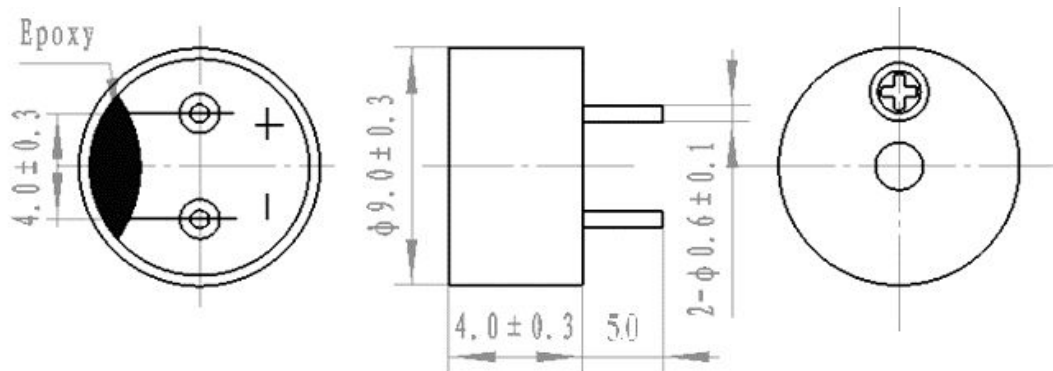

# BTM-0327



**ORDERING CODE**

**BT M - 03 27**

① ② ③ ④

- ① Magnetic Buzzer
- ② Series Number
- ③ Rated Voltage
- ④ Rated Frequency




No	Specification	Data
1	Rated Voltage (V)	3
2	Operating Voltage (V)	2~4
3	Coil Resistance (Ω)	16±3
4	Resonant Frequency (Hz)	2731±300
5	*Sound Output at 10cm (dB)	Min 85
6	*Current Consumption (mA)	Max 80
7	Operating Temperature (°C)	-25 ~ +70
8	Storage Temperature (°C)	-30 ~ +80
9	Weight (g)	0.8g
10	Housing Material	PPO
11	RoHS	Yes
12	Packing Quantity	1,000pcs/box

\*Applying rated voltage (Resonant frequency, 1/2 duty, Square wave)

**DIMENSIONS (unit : mm)**

\*Tolerance : ±0.5mm Except Specified

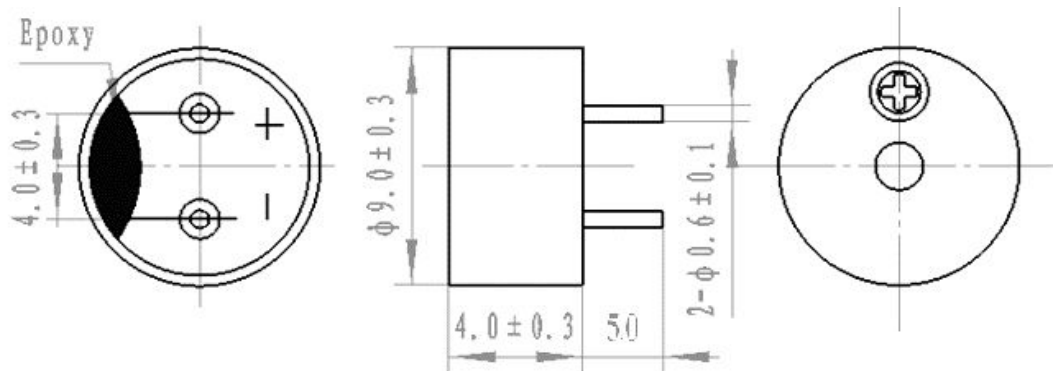

# BTM-0527



**ORDERING CODE**

**BT M - 05 27**

① ② ③ ④

- ① Magnetic Buzzer
- ② Series Number
- ③ Rated Voltage
- ④ Rated Frequency



No	Specification	Data
1	Rated Voltage (V)	5
2	Operating Voltage (V)	4~6
3	Coil Resistance (Ω)	30±3
4	Resonant Frequency (Hz)	2731±300
5	*Sound Output at 10cm (dB)	Min 85
6	*Current Consumption (mA)	Max 80
7	Operating Temperature (°C)	-25 ~ +70
8	Storage Temperature (°C)	-30 ~ +80
9	Weight (g)	0.8g
10	Housing Material	PPO
11	RoHS	Yes
12	Packing Quantity	1,000pcs/box

\*Applying rated voltage (Resonant frequency, 1/2 duty, Square wave)

**DIMENSIONS (unit : mm)**

\*Tolerance : ±0.5mm Except Specified

